

3.3m width true digital textile printer for disperse dye / pigment ink application

Teleios Grande



TU-4000

feeding and/or rewinding heavy and grand width fabric rolls, up to Ø40cm (approx. 400 linear yd, 65g/m²). strong air-shaft equipped as standard.




HeatMAN Grande (Option)

it allows high speed heat-fixation and curing of pigment ink. automatically controls speed and temperature as 80~220°C and can handle 80~100 linear m/hr.



Ink container for 2kg of ink pouch
ink container for 2kgs ink pouch for 6 colors. allows refilling inks while printing without staining your hands.

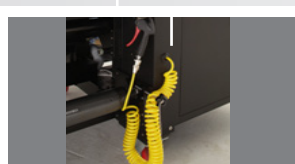


Air gun
standard equipped airgun allows easy handling of air shaft for stable feeding of heavy and grand width fabric rolls.




Air wiper
air wiper cleans dust without any contact nor damage to sensitive print heads for high quality production Continuously.



Patented cylinder system
d.gen's unique cylinder system for roll to roll fabric feeding may allow direct printing on fabrics like knit, power stretch, etc., without sticky belt.

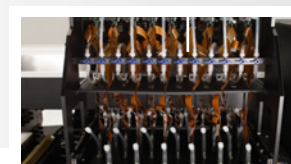

Printing unit
latest print head with 1,152 nozzles per color and 19.5cm printing band which enables to print as speed up to 180 m²/h.

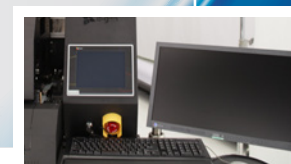

Touch panel and workstation stand
touch panel for easy handling of precise work and workstation(option) for rip s/w operation are concentrated for simple operation.

Teleios Grande

DNA from the original direct print & fixation
for stylish visual commutation



Teleios grande specification


Model	d.gen 3333TX	
Maximum Printing Width	1,000 ~ 3,300 mm	
Printing Method	Piezo inkjet (Ricoh GEN4L)	
Printing No of Color	4 colors / 6 colors (Option)	
Maximum Resolution	1,200 dpi	
Target Printing Speed	2 pass	188 m ² /h
	3 pass	136 m ² /h
	4 pass	105 m ² /h
	8 pass	60 m ² /h
Media Take-up System	Roll outer diameter : Maximum 200 mm (7.8 in.) Roll weight : Maximum 20 kg (44 lb.)	
Media Feeding System	Roll outer diameter : Maximum 350 mm (13.7 in.) Roll weight : Maximum 150 kg (330 lb.)	
Ink Type	Exclusive 2000cc pouch	
Outside Dimensions	5,700 (W) X 1,130 (D) X 1,800 (H) mm	
Power	AC 380 V, 3 Phase + N+ PE, ±10%, 18 A, 50/60 Hz	
Operational Environment	Power on - Temperature : 16~24°C / Humidity: 35~80% Power off - Temperature : 5~40°C / Humidity: 20~80%	
Weight	About 3,100 kg (Printer Unit : About 1,720Kg, Fixation unit : 1,290kg)	

d.gen, Inc. may change the product and/or media specifications or accessories without any prior notice and has no liability for printing results in any case.
d.gen, Inc. is not responsible for any incidental and/or inevitable damage from using this product.

Disperse dye ink for soft_signage application



D.GEN Inc. TÜRKİYE MÜMESSİLİ **SPOT ULUSLARARASI TEKSTİL SANAYİ VE MÜMESSİLLİK LTD. ŞTİ.**

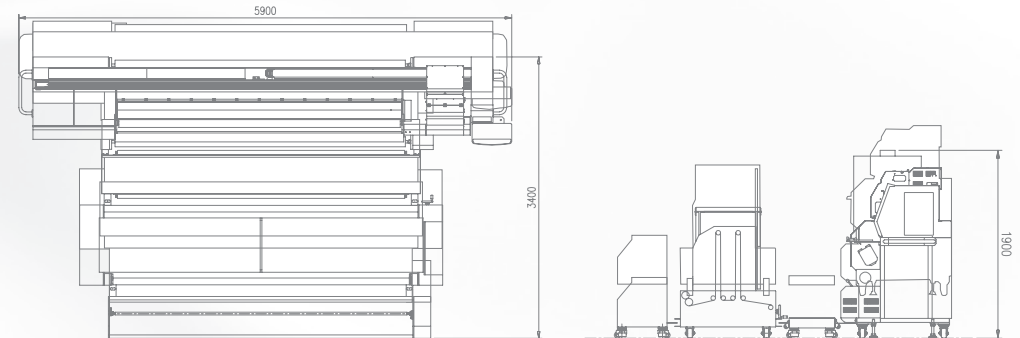

Pigment ink for textile printing application



Ataşehir Bulvarı Ata 4 Plaza No: 55 Ataşehir 34758 İstanbul - TÜRKİYE
Tel: +90 (216) 456 57 30 pbx Fax: +90 (216) 456 57 37 e-mail: spot@spotltd.com

www.spotltd.com
www.dgen.com